



Touchless - NO Touch Exit Buttons

with Mechanical Override Push Button or Keypad

HEAVY-DUTY FLAT SS-304 PLATE -2 MM

Dimensions : American Size
ANSI Standard

Multi-Voltage Input : 12-24 vdc

Models :

- Sek-1200-NT- Override (Momentary Signal)
- Sek-1200-NT-Timer- Override (Adjustable Timer)
- Sek-1000-NT- TD- Override Timer & Distance (Adjustable Timer and Distance)

Led Color Change on Waving of Hand



SEK-1200-NT-OR



SEK-1200-NT-KS


Detection range Adjustable from 4 cm to 15mm

Fast Response & Higher Detection Range

Specification

- Size: 114 mm by 70 mm
- Standard Structure: Steel Button
- Current Rating: 3A@36VDC Max
- Output Contact: NO/NC/COM
- Mechanical Life: 500000 tested
- Suitable for Door: Hollow Door
- Operating temp: 10~+55°C(14-131F)
- Operating Humidity: 0-95%(relative humidity)
- Weight: 0.23kg
- Actual Product might look Slightly different from Photos shown above

Wiring Diagram

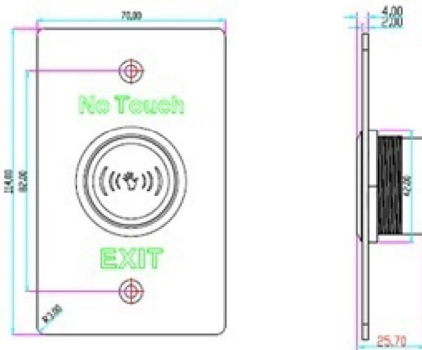

Led Detection Behaviour

- LED Indicator:
 - White LED indicator: Power OFF
 - Red LED indicator: Power ON(standby)
 - Green LED indicator: Power ON(sensation)

Installation

